


- ALL ALUMINIUM SLIDE
- STANDARD LENGTHS 300mm TO 600mm IN 50mm INCREMENTS
- RoHS COMPLIANT
- SLIDE WEIGHT: 1.8KGS/METRE PER PAIR
- NON STANDARD SLIDES ARE AVAILABLE (CUSTOM LENGTHS/EXTENSIONS/FIXING METHODS). STANDARD EXTENSIONS SHOWN ON LOAD GRAPH BELOW.



CLOSED LENGTH		300	350	400	450	500	550	600
EXTENSION		180	210	280	315	350	385	440
CHASSIS BEAM	TOTAL No FIXING HOLES	3	3	4	4	5	5	6
	No. OF HOLES ON 100 PITCH (y)	2	2	3	3	4	4	5
	DIMENSION A	63	93	63	98	33	68	23
FRAME BEAM	TOTAL No FIXING HOLES	5	7	6	8	7	8	8
	No OF FIXING HOLES ON 100 PITCH (X)	3	4	4	5	5	6	6
	DIMENSION B	87.5	37.5	87.5	37.5	87.5	37.5	87.5
	FIXING HOLE DIM C	50	25	50	25	50	25	50
	FIXING HOLE DIM D	50	50	50	50	50	50	50
FIXING HOLE DIM E	-	100	100	150	-	150	150	

NOTE 1
 Ø 15.0 HOLE IN CHASSIS BEAM ALLOWS EASY ACCESS TO FIXING HOLES IN FRAMEWORK BEAM. M4 COUNTERSUNK HEAD SCREWS TO DIN 7991 RECOMMENDED FOR FIXING

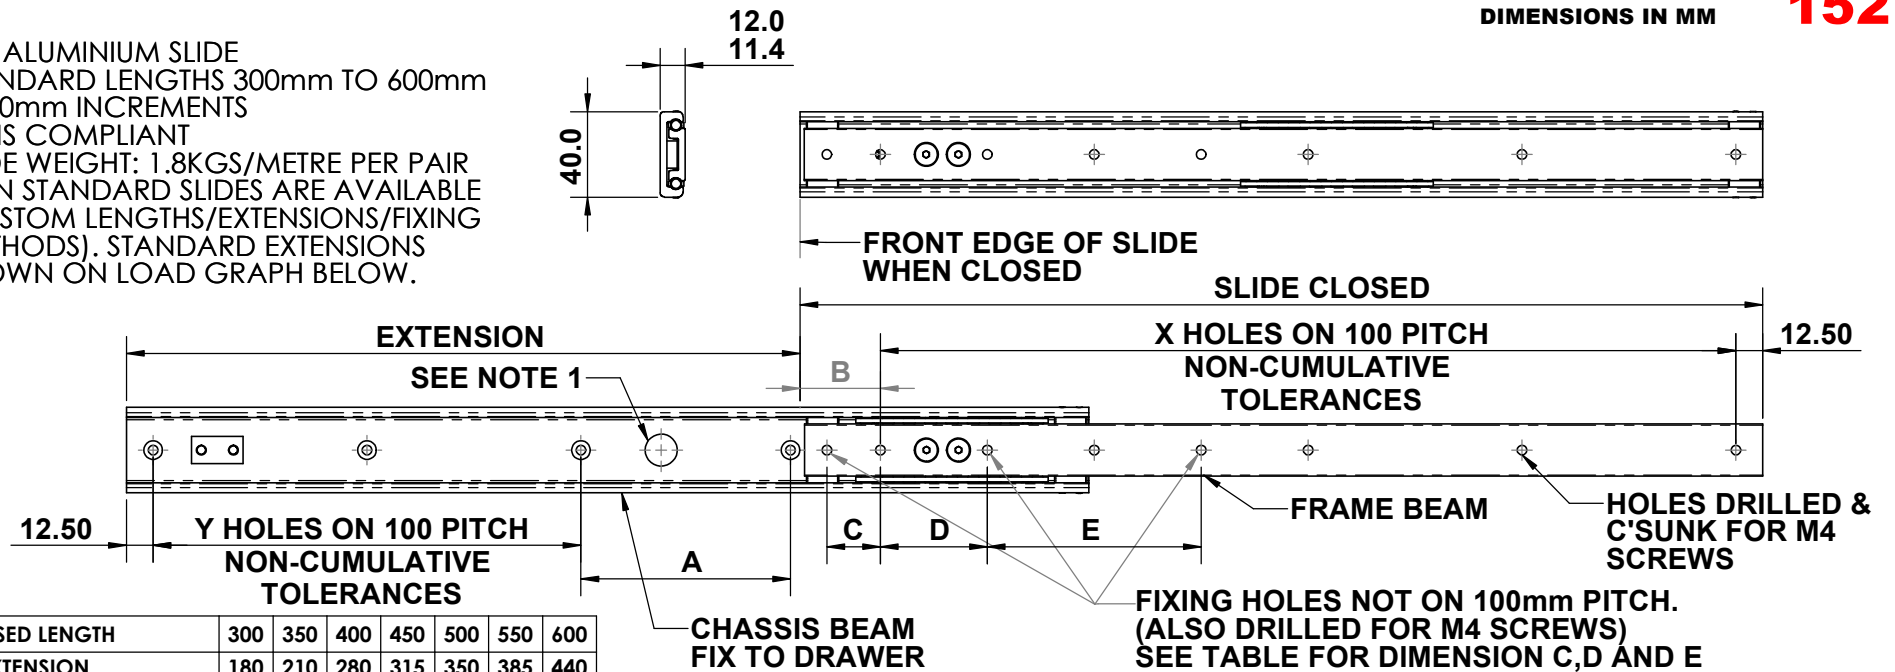

Widney Manufacturing Limited
 Plume Street, Aston, Birmingham, B6 7RT England
 Tel +44 (0)121 327 5500
 Fax +44 (0)121 328 2466
 www.widney.co.uk

152 Side Load Data

