



- ALL ALUMINIUM SLIDE
- NON STANDARD SLIDES ARE AVAILABLE (CUSTOM LENGTHS/EXTENSIONS/FIXING METHODS)
- FOR APPLICATIONS COVERING SHOCK AND VIBRATION PLEASE CONTACT OUR SALES TEAM
- STANDARD LENGTHS 300MM TO 600MM IN 50MM INCREMENTS
- RoHS COMPLIANT

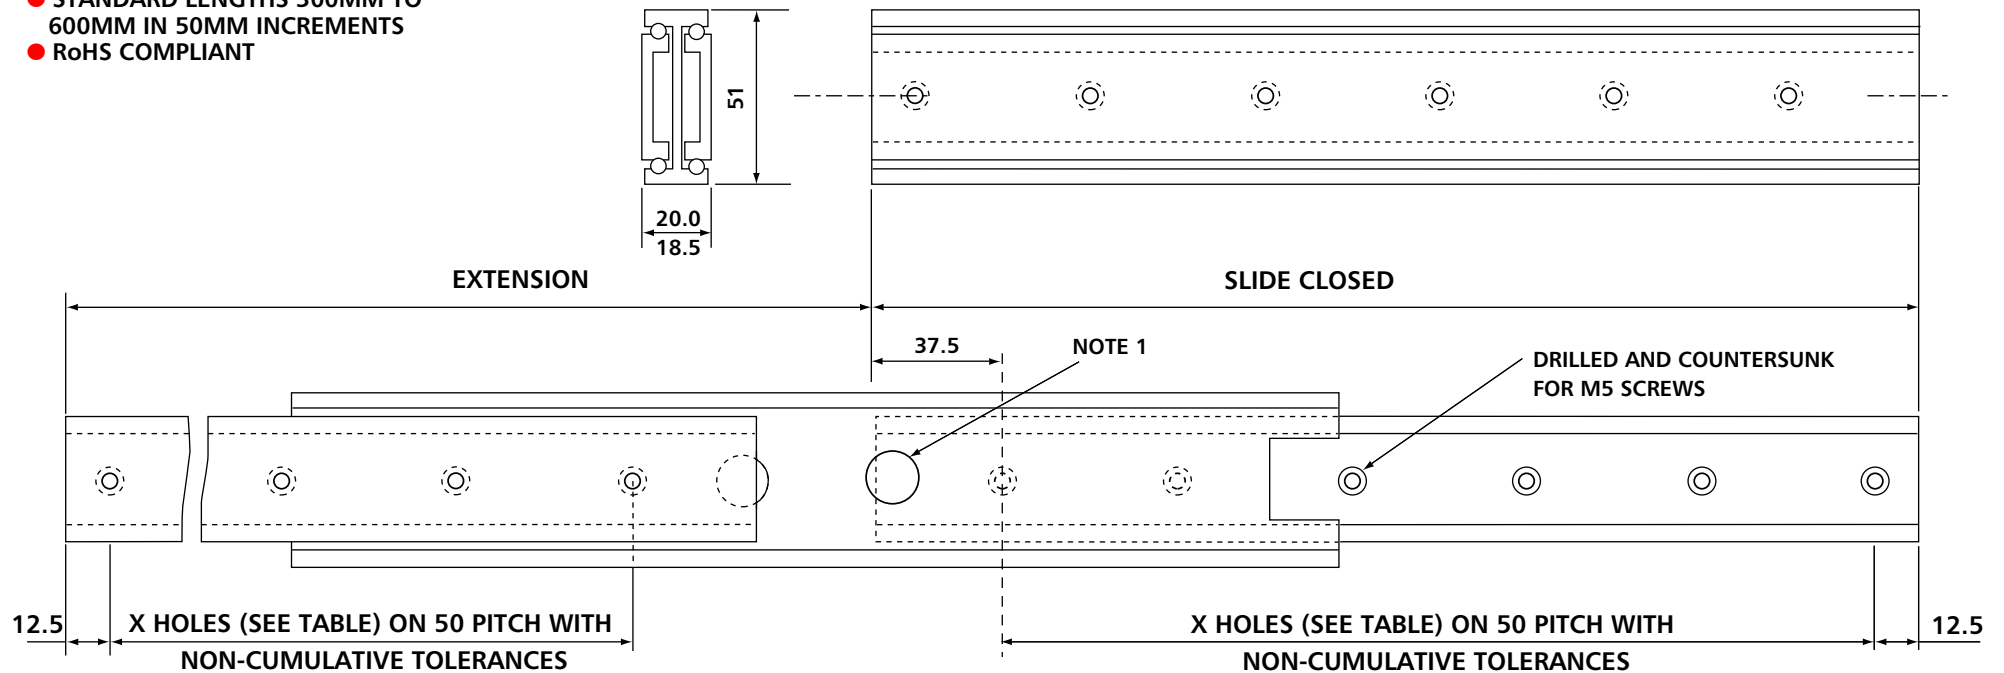

NOTE: 1. 15MM DIA HOLES IN CENTRE BEAM ALLOW EASY ACCESS TO FIXING HOLES. M5 COUNTERSUNK HEAD SCREWS TO BS4183 ARE RECOMMENDED FOR FIXING

STANDARD LENGTHS-TYPE 210 SLIDES

CLOSED LENGTH	300	350	400	450	500	550	600
EXTENSION	330	380	430	480	530	580	630
NO. HOLES IN EACH BEAM (X)	6	7	8	9	10	11	12

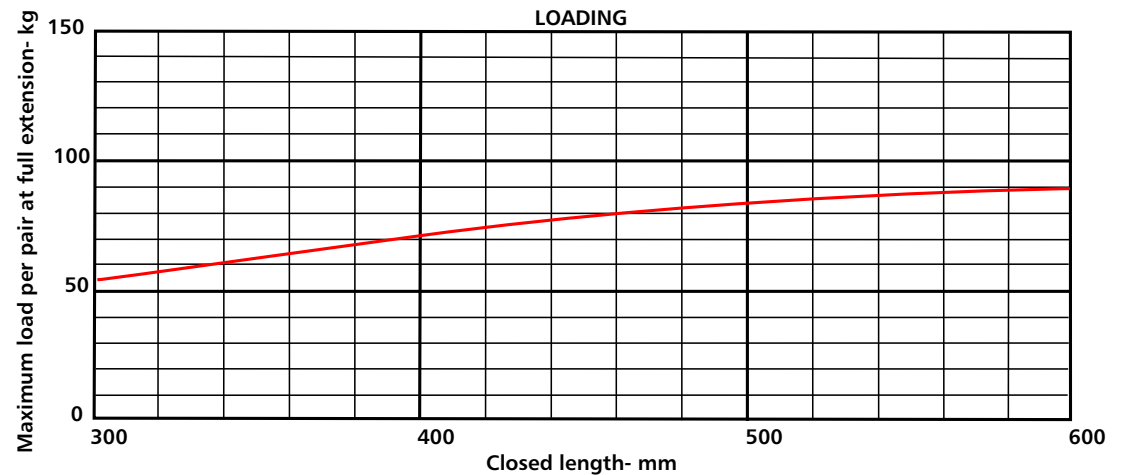

Widney

Widney Manufacturing Limited,
Plume Street, Aston, Birmingham, B6 7RT. England.
Tel: +44 (0)121 327 5500.
Fax: +44 (0)121 328 2466.
www.widney.co.uk