



- ALL ALUMINIUM SLIDE
- NON STANDARD SLIDES ARE AVAILABLE (CUSTOM LENGTHS/EXTENSIONS/FIXING METHODS)
- FOR APPLICATIONS COVERING SHOCK AND VIBRATION PLEASE CONTACT OUR SALES TEAM
- STANDARD LENGTHS 300MM TO 600MM IN 50MM INCREMENTS
- RoHS COMPLIANT

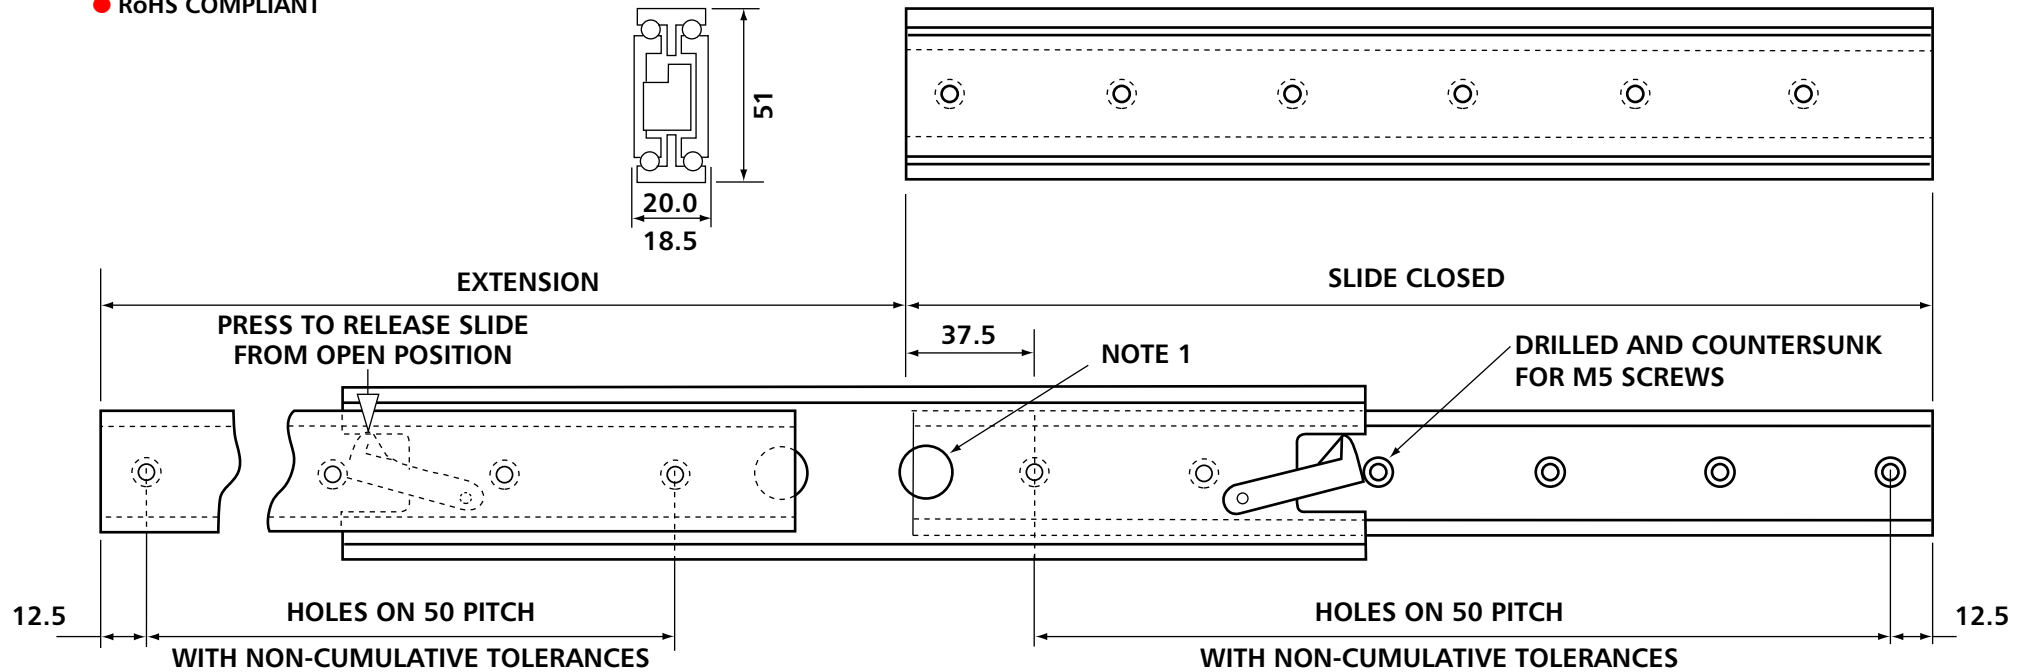

NOTE 1: 15MM DIA. HOLES IN CENTRE BEAM ALLOW EASY ACCESS TO FIXING HOLES. M5 COUNTERSUNK HEAD SCREWS TO BS4183 ARE RECOMMENDED FOR FIXING.

NOTE 2: ELONGATED HOLES SHOULD BE PROVIDED IN EITHER THE FRAMEWORK OR CHASSIS TO GIVE ADJUSTMENT IF IT IS NECESSARY FOR THE PANEL TO FIT TIGHTLY AGAINST THE FRAMEWORK.

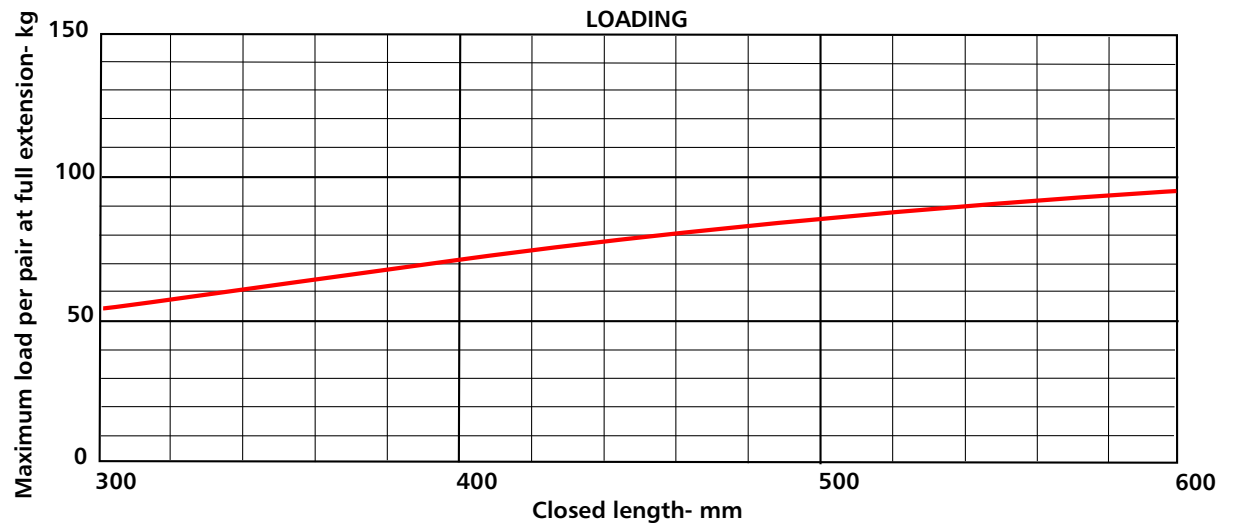

Widney

Widney Manufacturing Limited,
Plume Street, Aston, Birmingham, B6 7RT. England.
Tel: +44 (0)121 327 5500.
Fax: +44 (0)121 328 2466.
www.widney.co.uk