


- ALL ALUMINIUM SLIDE
- NON STANDARD SLIDES ARE AVAILABLE (CUSTOM LENGTHS/EXTENSIONS/FIXING METHODS)
- FOR APPLICATIONS COVERING SHOCK AND VIBRATION PLEASE CONTACT OUR SALES TEAM
- STANDARD LENGTHS 300MM TO 1000MM IN 50MM INCREMENTS
- SLIDE WEIGHT 6.5KGS/METRE PER PAIR
- RoHS COMPLIANT

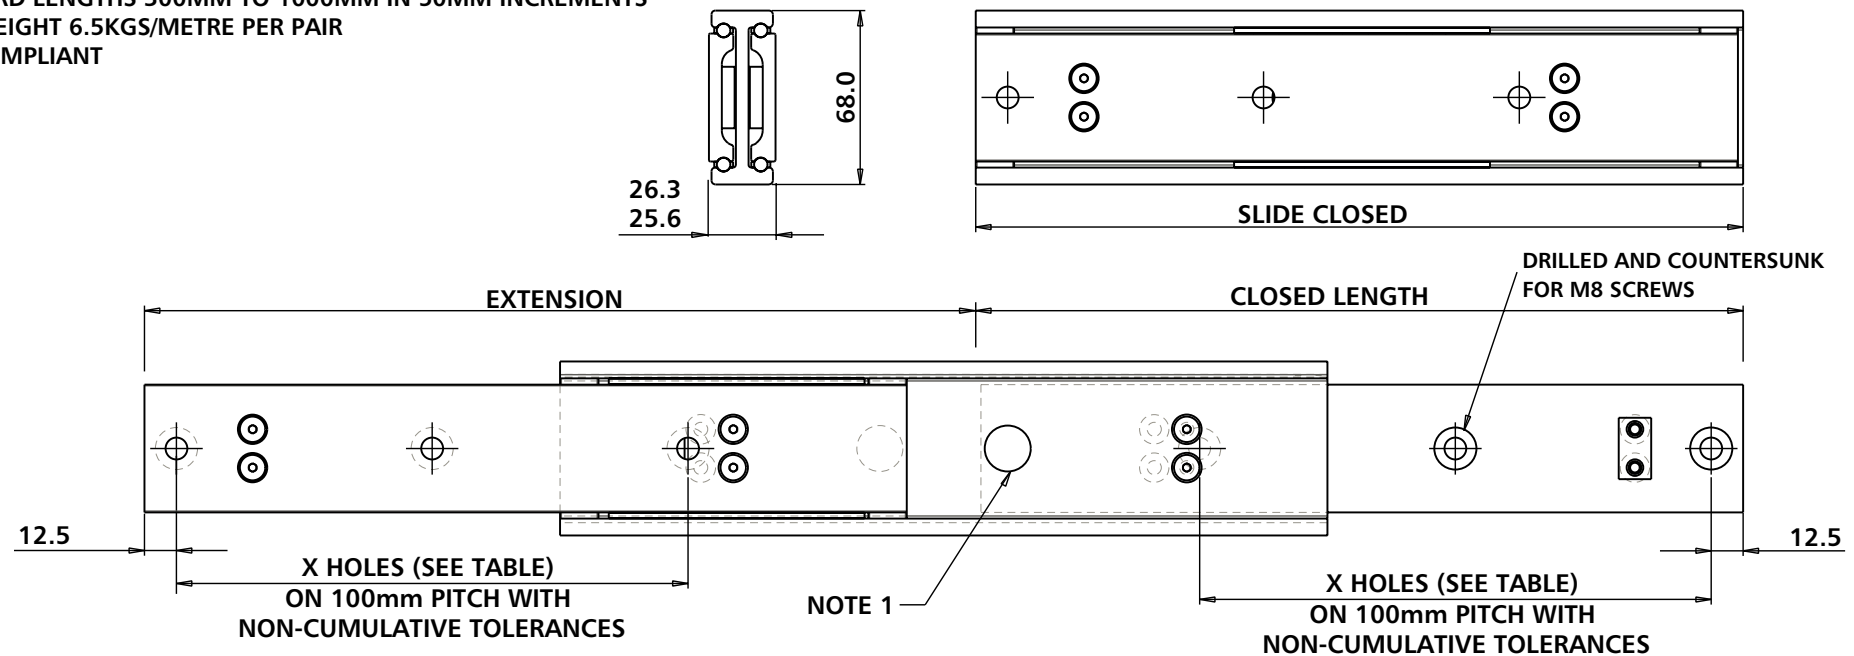

NOTE: 1.
18MM DIA HOLES IN CENTRE BEAM ALLOW EASY ACCESS TO FIXING HOLES
M8 COUNTERSUNK HEAD SCREWS TO BS4183 ARE RECOMMENDED FOR FIXING

STANDARD LENGTHS 410 SLIDE

CLOSED LENGTH	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
EXTENSION	325	375	425	475	525	575	625	675	725	775	825	875	925	975	1025
NO. HOLES IN EACH BEAM (X)	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10

Registered Community Design No. 1887761-0001

Widney

Widney Manufacturing Limited,
Plume Street, Aston, Birmingham, B6 7RT. England.
Tel: +44 (0)121 327 5500.
Fax: +44 (0)121 328 2466.
www.widney.co.uk

